


|      |             |       |
|------|-------------|-------|
| REV. | ECN.NO.     | APPD. |
| A    | EXXXXXXXXXX | 陈建辉   |

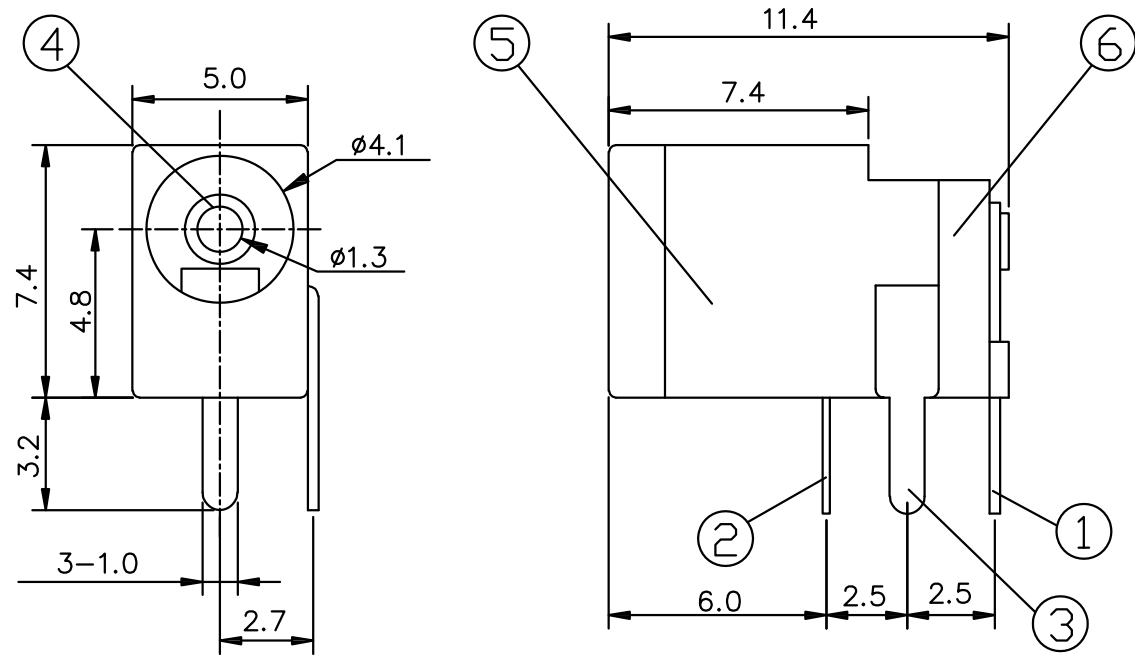


- 1.CURRENT RATING : 1.0 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING : AC 500V/min R.M.S.
- 3.INSULATION RESISTANCE : 100M $\Omega$  min. AT 100V DC.
- 4.CONTACT RESISTANCE : 50m $\Omega$  MAX.
- 5.OPERATING TEMPERATURE : -25°C TO +85°C.
- 6.DURABILITY : 1500 CYCLES.
- 7.MATING FORCE : 3kgs MAX
- 8.UNMATING FORCE : 0.3~3.0kgs
- 9.MAX PROCESSING TEMPERATURE : 60 SECONDS IN 230°C AND 10 SECONDS IN 260°C


JK1-257-4118

4: 镀锡  
1: PA46  
1: 黑色

线路板安装尺寸示意图

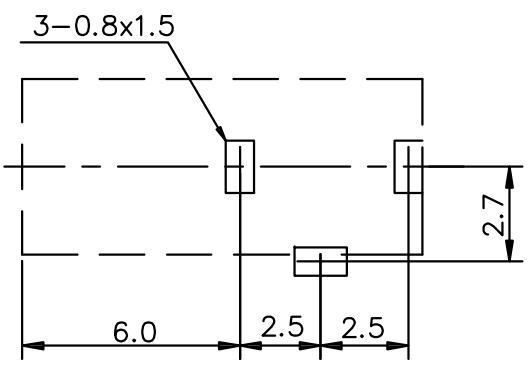

电路结构示意图



|                                      |            |  |                |        |        |      |
|--------------------------------------|------------|--|----------------|--------|--------|------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |            | <b>HLW 深圳市华联威电子科技有限公司</b>                    |                |        |        |      |
| .XXX ±0.10                           |            | HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD. |                |        |        |      |
| .XX ±0.20                            |            |  |                |        |        |      |
| .X ±0.30                             |            |  |                |        |        |      |
| APPROVED                             |            | PART NAME:                                   | DC-002中心柱1.3全铁 |        |        |      |
| CHECKED                              |            | PART No:                                     | JK1-257-4118   | C      |        |      |
| DRAWN                                | 陈建辉        | PROJECTION:                                  | UNIT:          | SCALE: | SHEET: | REV. |
| DATE                                 | 2022.10.17 |  | mm             | 1:1    | 1 OF 1 | A    |