

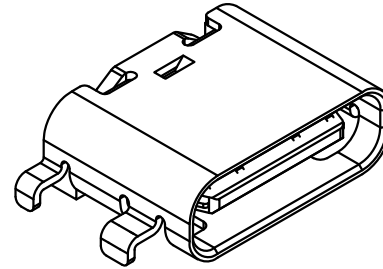

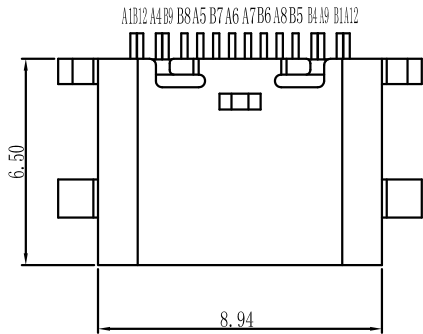

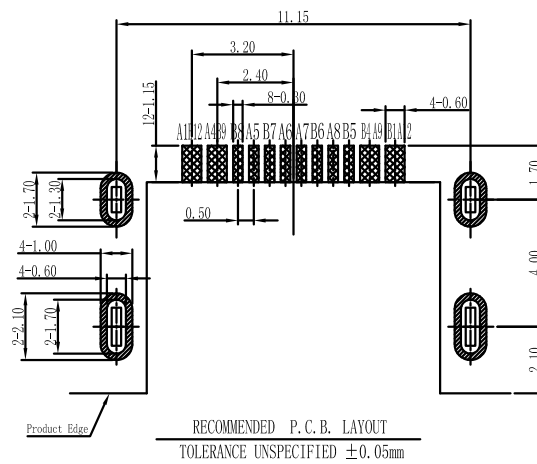
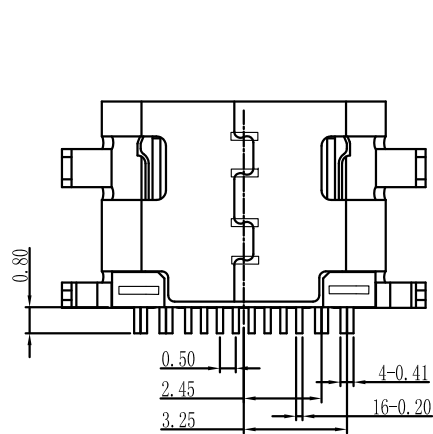



REV.	ECN.NO	APPD
AO	/	/



- NOTES:
- MATERIAL:
 - Housing:thermoplastic plastics
 - terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
 - Shell:Steel&Copper Alloy
Nickel/Au Plated overall
 - characteristics:
 - Rating Voltage : 30V AC.
 - Rating Current:
5A for Vbus PIN;1.25A for Vconn PIN
 - Contact Resistance:40 mΩ MAX.
 - Insulation Resistance:100 MΩ MIN.
 - Withstanding Voltage:AC 100V
 - Mating force: 5°20N MAX
 - Extraction force:8°20N Min
 - Life test:10000Cycles MIN.
 - Temperature Range: -30℃~+80℃.
- The product must be compliance ROHS

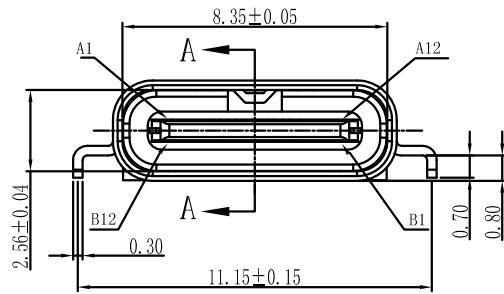

TOLERANCE UNLESS OTHERWISE SPECIFIED		HLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XXX ±0.10	.XX ±0.20	.X ±0.30	.X° ±3°	.XX° ±2°	
APPROVED		PART NAME:	TYPE C 16P/F 沉板0.8 卷带H款		
CHECKED		PART No.:	U578-061B-161038		C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2021.6.19		mm	1:1	10F1
					REV. AO