


REV.	ECN.NO.	APPD.
A	/	ZFY

- 技术指标 (Technical Index) :
1. 工作温度 (Temperature range) : -25° C-85° C.
  2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
  3. 额定电流 (Rated current) : 5A AC, DC
  4. 接触阻抗 (CONTACT Resistance) :  $\leq 25M\Omega$
  5. 耐压值 (Withstanding voltage) : 1500V AC/minute
  6. 绝缘阻抗 (Insulation resistance)  $\geq 1000M\Omega$

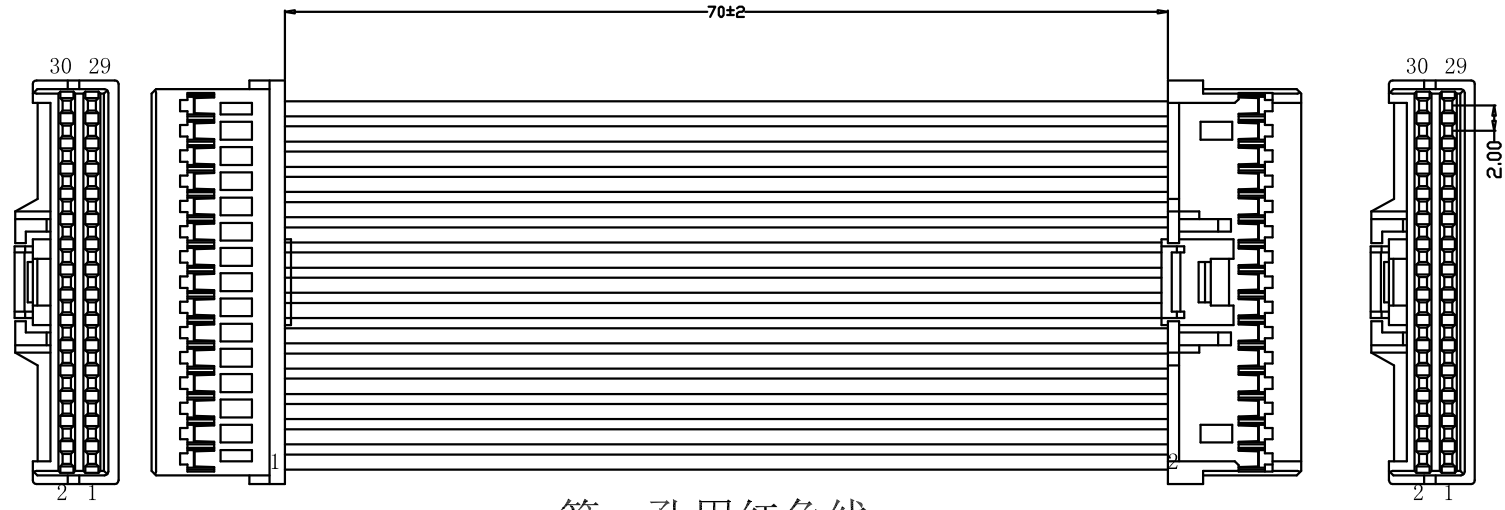

216104-1124-G33018

- G: 镀半金G/Fu
- 1: 盘装
- 3: 米白色
- 3: PA6T

第一孔用红色线



插线方式: 1孔接1孔、2孔接2孔、3孔接3孔.....30孔接30孔

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.15	.X° ±5°
.XX ±0.20	.XX° ±2°
.X ±0.30	

**FLW 深圳市华联威电子科技有限公司**  
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.

APPROVED		PART NAME:	2.0间距连接器 1007#26 30芯 线长70MM 双头异面 带扣18PIN			
CHECKED		PART No:	216104-1124-G33018			C
DRAWN	ZhangFenYan	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2018.10.10		mm	1:1	10F1	A