
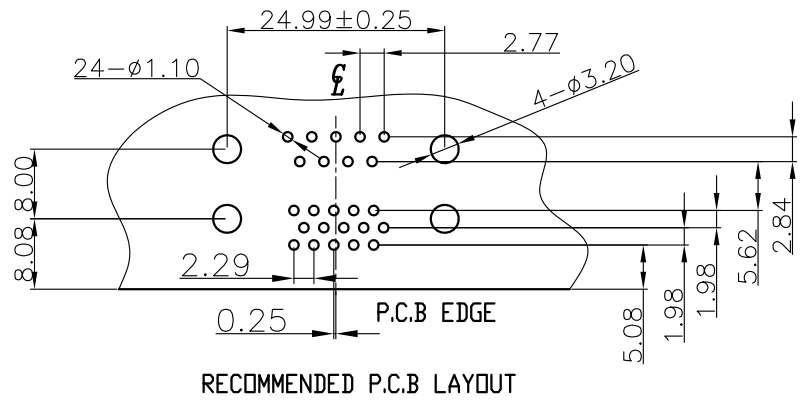
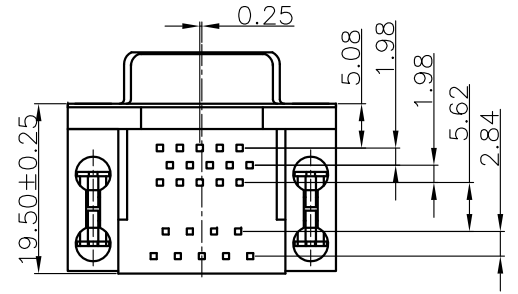


REV.	ECN.NO.	APPD.
A	/	ZDC

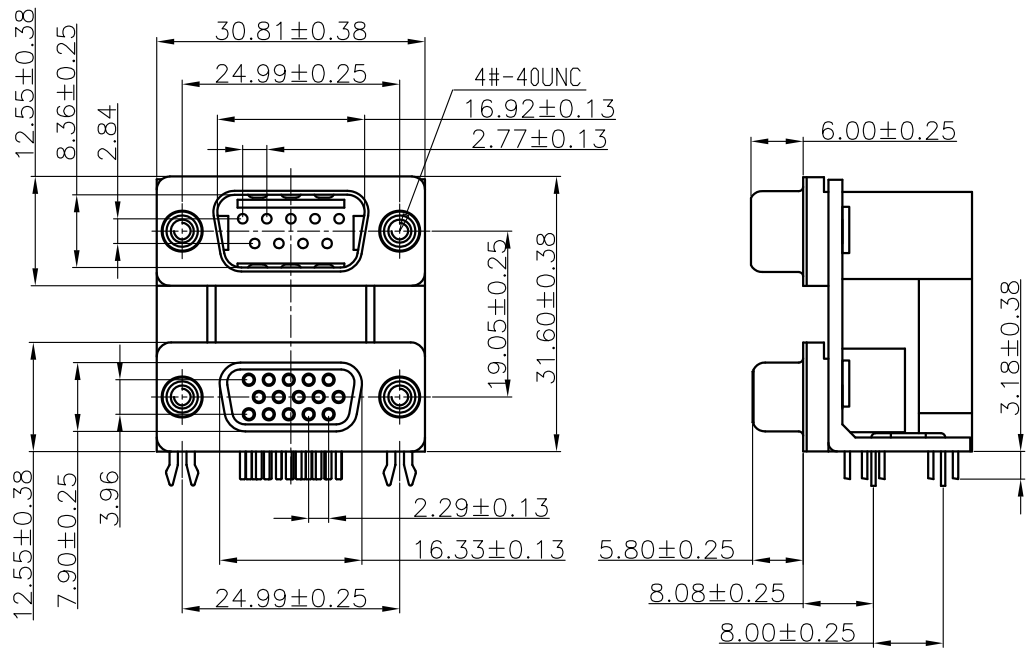

1.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000MΩ Min.
- 2.3 Dielectric Strength:500V AC PER MIN
- 2.4 Operation Temperature:°55C~+105C
- 2.5 Contact Resistance:30mΩ Max

DS812-5310-XXX01

1: 半金1u”  
D: 上绿下蓝  
2: PBT

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGYELECTRONICSCO;LTD.	
APPROVED		PART NAME:	D-SUB 9M+15F 叉锁锁(5.08) 19.05*8.0 叉型半金铆锁 不带螺丝 上绿下蓝		
CHECKED		PART No:	DS812-5310-12D01	C	
DRAWN	ZhouDachao	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2017.09.19		mm	1:1	1 OF 1
					REV. A