

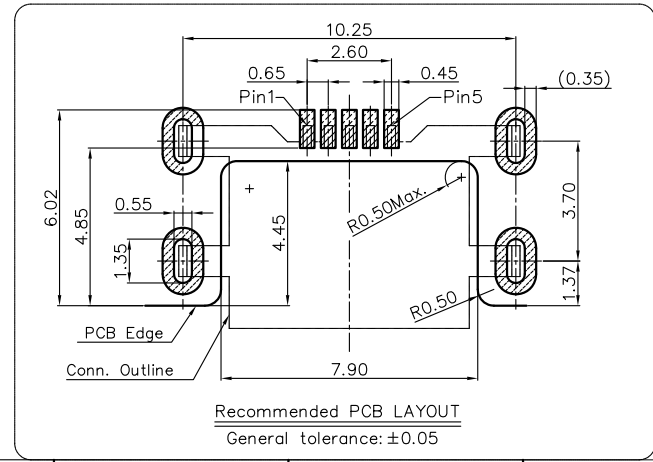
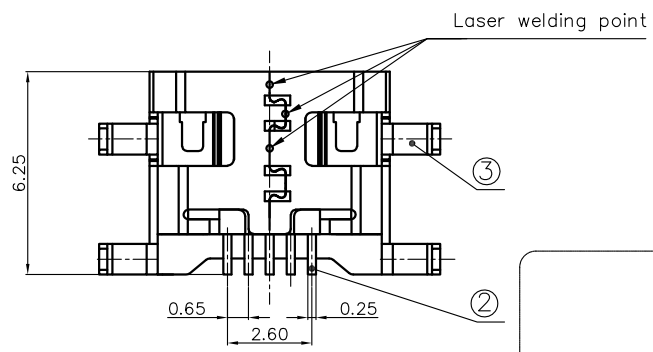

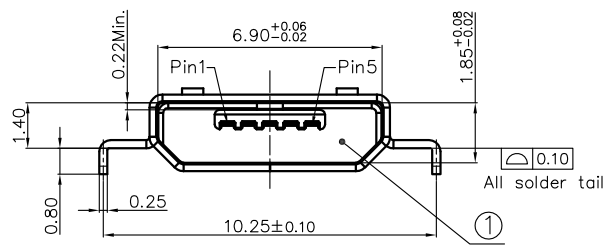



REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	yangguifeng

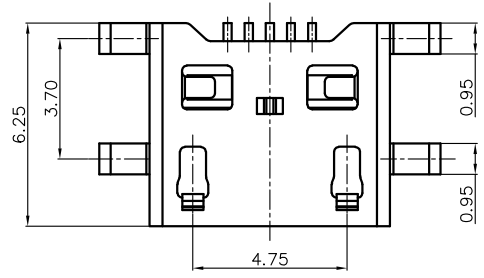

NOTES:

- MATERIAL:
  - Housing: thermoplastic plastics,
  - terminals: Copper Alloy  
Gold plated overall
  - Shell: Steel & Copper Alloy  
Nickel/Tin Plated overall
- ELECTRICAL CHARACTERISTICS:
  - Rating Current :1.5 Ampere
  - Rating Voltage :30 V Max
  - Contact Resistance:50 Milli ohms
  - Insulation Resistance:100 Mega ohms Min.
- MECHANICAL CHARACTERISTICS:
  - Connector Mating force: 35N MAX
  - Connector Unmating force:7N min
- ENVIRONMENT CHARACTERISTICS:
  - Operating temperature:-0°C to +50°C
  - Storage temperature:-20°C to +60°C

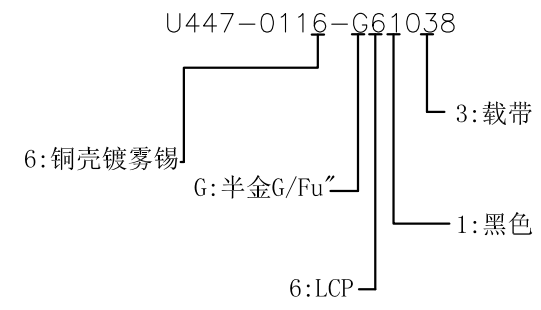

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.	
APPROVED		PART NAME:	MICRO 5P 四脚沉板0.8		
CHECKED		PART No:	U447-0116-G61038	C	
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2021.12.01		mm	1:1	1 OF 1
					REV. A