


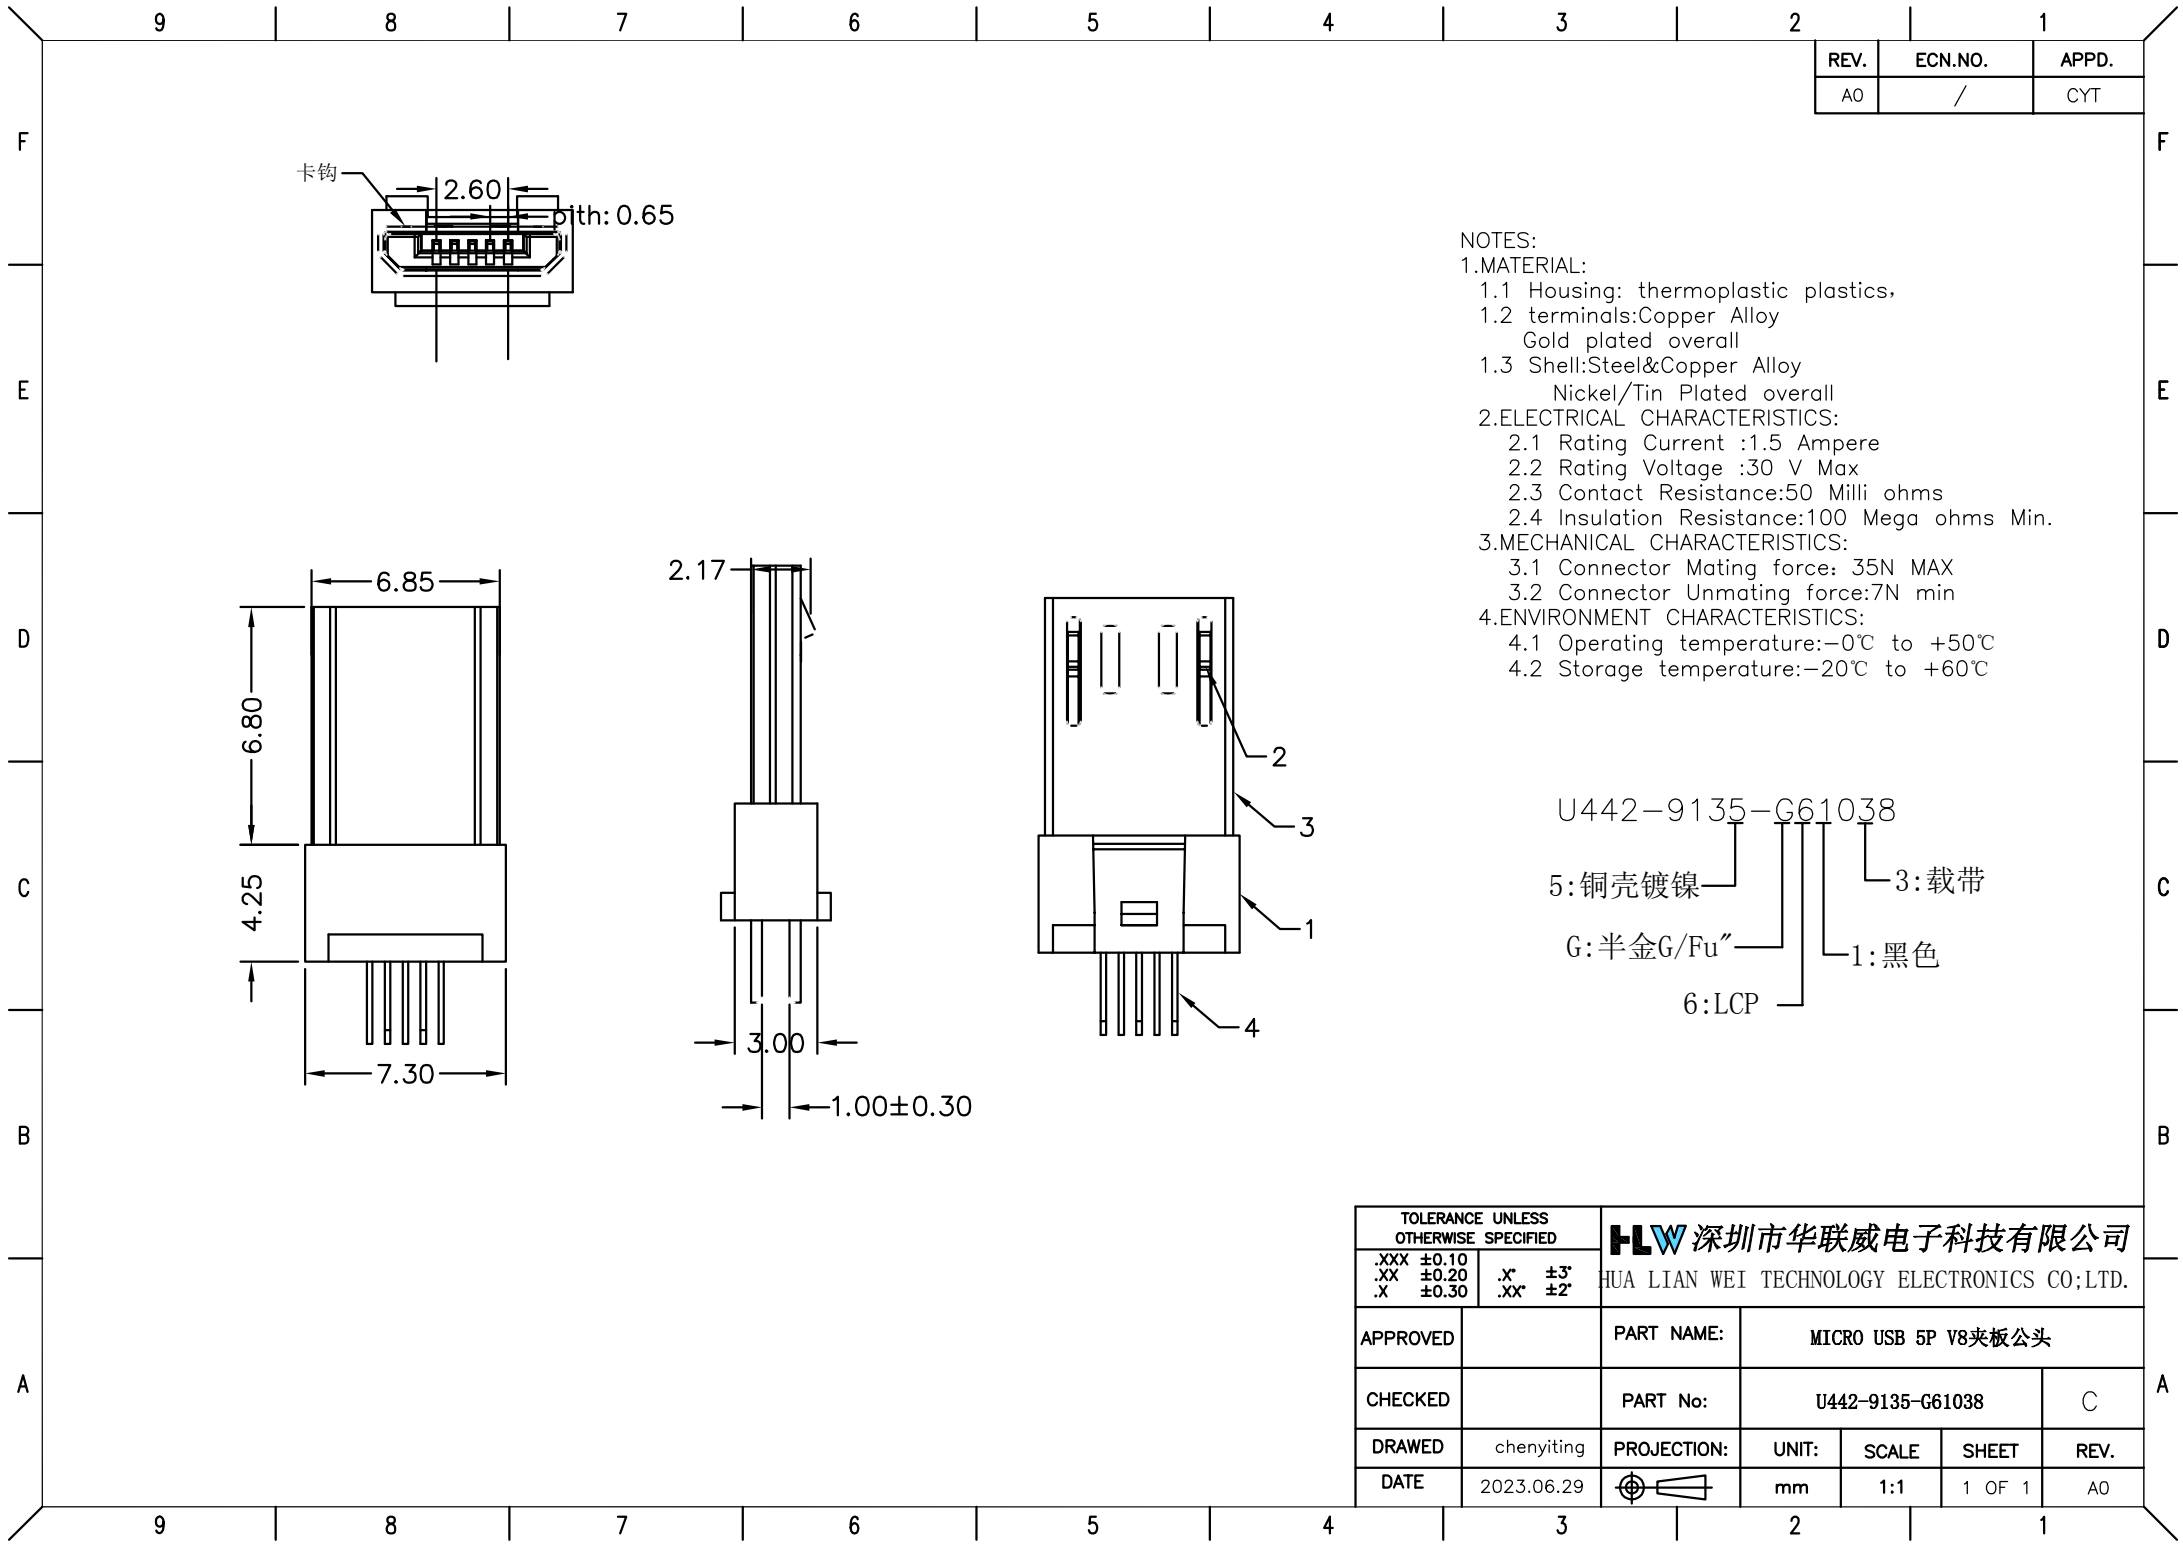

REV.	ECN.NO.	APPD.
A0	/	CYT

- NOTES:
- 1.MATERIAL:
- 1.1 Housing: thermoplastic plastics,
- 1.2 terminals:Copper Alloy
Gold plated overall
- 1.3 Shell:Steel&Copper Alloy
Nickel/Tin Plated overall
- 2.ELECTRICAL CHARACTERISTICS:
- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :30 V Max
- 2.3 Contact Resistance:50 Milli ohms
- 2.4 Insulation Resistance:100 Mega ohms Min.
- 3.MECHANICAL CHARACTERISTICS:
- 3.1 Connector Mating force: 35N MAX
- 3.2 Connector Unmating force:7N min
- 4.ENVIRONMENT CHARACTERISTICS:
- 4.1 Operating temperature:-0℃ to +50℃
- 4.2 Storage temperature:-20℃ to +60℃

U442-9135-G61038

5:铜壳镀镍 3:载带

G:半金G/Fu" 1:黑色

6:LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		HLW 深圳市华联威电子科技有限公司				
.XXX ±0.10	.X" ±3°	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20	.XX" ±2°					
.X ±0.30		APPROVED	PART NAME: MICRO USB 5P V8夹板公头			
		CHECKED	PART No: U442-9135-G61038			C
		DRAWN chenyingting	PROJECTION:	UNIT:	SCALE	SHEET
		DATE 2023.06.29		mm	1:1	1 OF 1
						REV. A0