
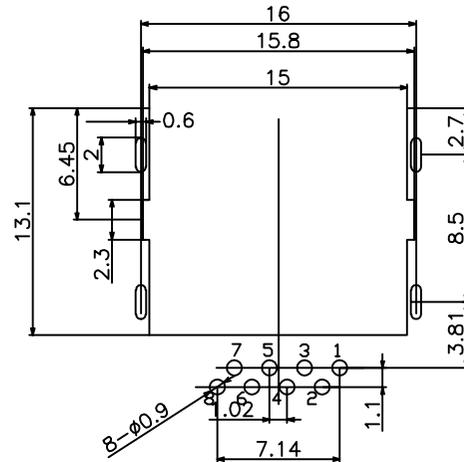
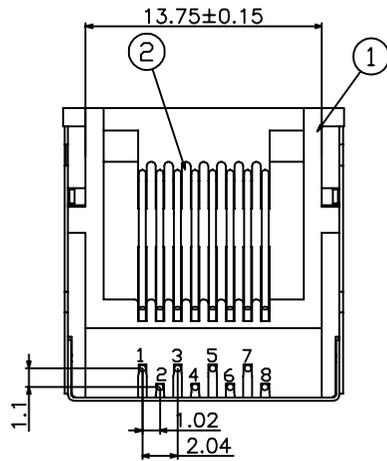
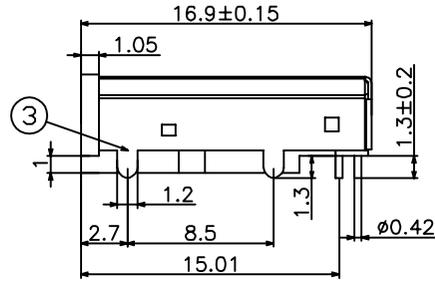


REV.	ECN.NO.	APPD.
A	/	/

技术参数(SPECIFICATION):

温度范围 (TEMPERATURE RANGE): -40~+70℃
 额定电压 (VOLTAGE RATING): 125V
 额定电流 (CURRENT RATING): 1.5A
 接触阻抗 (CONTACT RESISTANCE): ≤30mΩ
 绝缘电阻 (INSULATION RESISTANCE): ≥500MΩ
 耐压 (DIELECTRIC STRENGTH): 1000V AC/(50HZ)/Min
 插拔力 (MATING AND UNMATING FORCE): 3~20N
 寿命 (DURABILITY): 750 CYCLES MIN



PCB LAYOUT
RECOMMENDED

Table 1

X	Terminal Plating
0	Au Fu" Plating
1	Au 1u" Plating
2	Au 2u" Plating
3	Au 3u" Plating
4	Au 6u" Plating
5	Au 10u" Plating
6	Au 15u" Plating
7	Au 30u" Plating

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

FLW 深圳市华联威电子科技有限公司
 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.

APPROVED		PART NAME:	PCH-SP-37(带屏)			
CHECKED		PART No:	SD5211-090-13R			C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.07.06		mm	1:1	10F1	A