
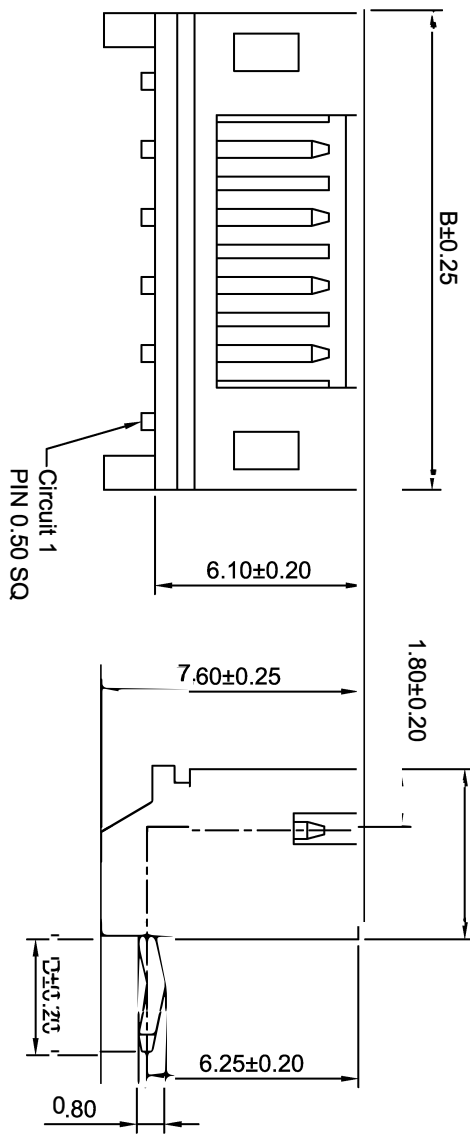
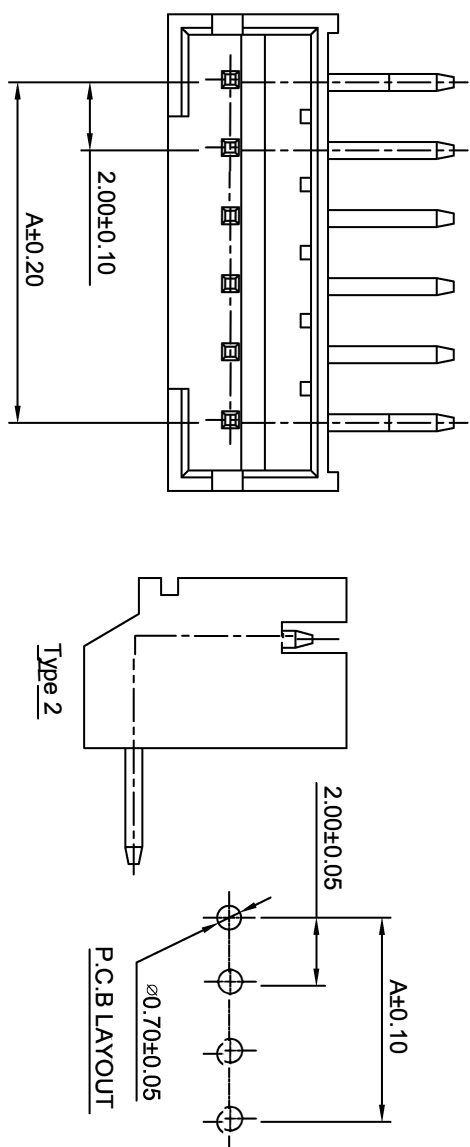


REV.	ECN/NO.	APPD.
A	/	/



**SPECIFICATIONS:**

Current Rating: 2A AC/DC  
Voltage Rating: 100V AC/DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 10mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage: 800V AC/minute  
Pin Material: Brass/Tin over Nickel  
Material: Nylon 66, UL94V-0(White)

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits		Dimensions(mm)	
	A	B	A	B	A	B
2P	2.00	6.00	12P	22.00	26.00	
3P	4.00	8.00	13P	24.00	28.00	
4P	6.00	10.00	14P	26.00	30.00	
5P	8.00	12.00	15P	28.00	32.00	
6P	10.00	14.00	16P	30.00	34.00	
7P	12.00	16.00	17P	32.00	36.00	
8P	14.00	18.00	18P	34.00	38.00	
9P	16.00	20.00	19P	36.00	40.00	
10P	18.00	22.00	20P	38.00	42.00	
11P	20.00	24.00				

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司	
XXX ±0.10	XX ±0.20	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
.XX ±0.30	.X ±0.50		

APPROVED	PART NAME:	针座 PH 间距 2.0 卧插 8P	
----------	------------	--------------------	--

CHECKED	PART No.:	216104-1075-G32018	
---------	-----------	--------------------	--

DRAWN	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	weihong	mm	1:1	10F-1	A

DATE	2021.7.23	UNIT:	mm	SCALE	1:1	SHEET	10F-1	REV.	A
------	-----------	-------	----	-------	-----	-------	-------	------	---