
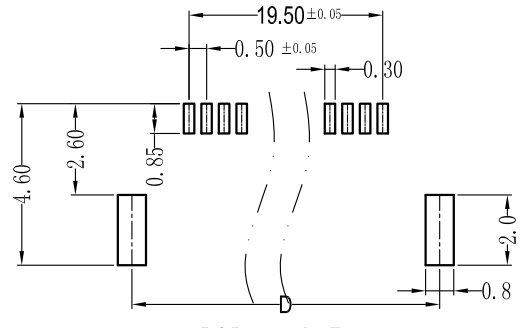

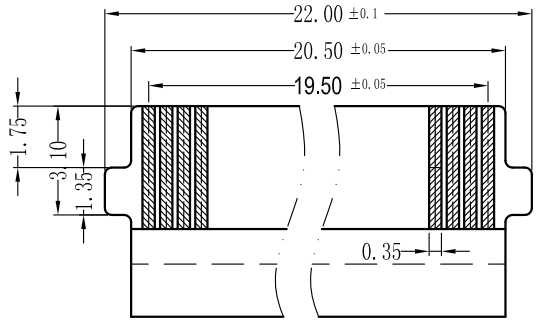

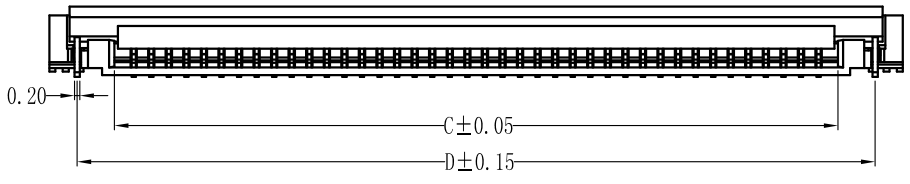



REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	yangguifeng


- 技术指标 (Technical Index) :
1. 工作温度 (Temperature range) : -25° C-85° C.
 2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
 3. 额定电流 (Rated current) : 5A AC, DC
 4. 接触阻抗 (CONTACT Resistance) : $\leq 25\text{M}\Omega$
 5. 耐压值 (Withstanding voltage) : 1500V AC/minute
 6. 绝缘阻抗 (Insulation resistance) $\geq 1000\text{M}\Omega$

216104-1095-G61018
 G: 半金G/Fu 1: 吸塑盒
 6: LCP 1: 黑色

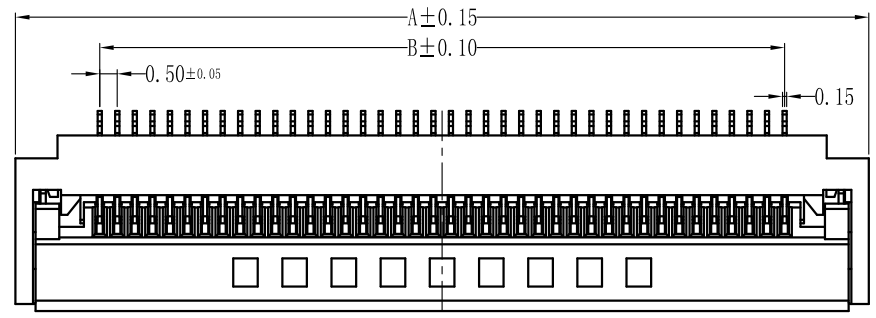

No. of Contacts	DIM.			
	A	B	C	D
06	7.30	2.50	3.60	5.72
08	8.30	3.50	4.60	6.72
10	9.30	4.50	5.60	7.72
12	10.30	5.50	6.60	8.72
13	10.80	6.00	7.10	9.22
18	13.30	8.50	9.60	11.72
30	19.30	14.50	15.60	17.72
40	24.30	19.50	20.60	22.72
50	29.30	24.50	25.60	27.72
60	34.30	29.50	30.60	32.72

RECOMMENDED FPC DIMENSION



TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XXX ±0.10	.XX ±0.20	.X ±0.30	.X' ±3'	.XX' ±2'	
APPROVED		PART NAME:	FPC2.0间距0.5 32P		
CHECKED		PART No:	216104-1095-G61018	C	
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE:	SHEET:
DATE	2021.12.01		mm	1:1	1 OF 1
					REV. A