
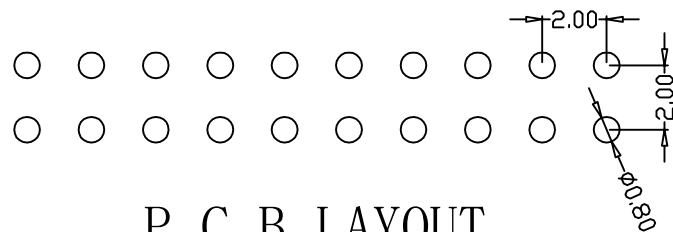
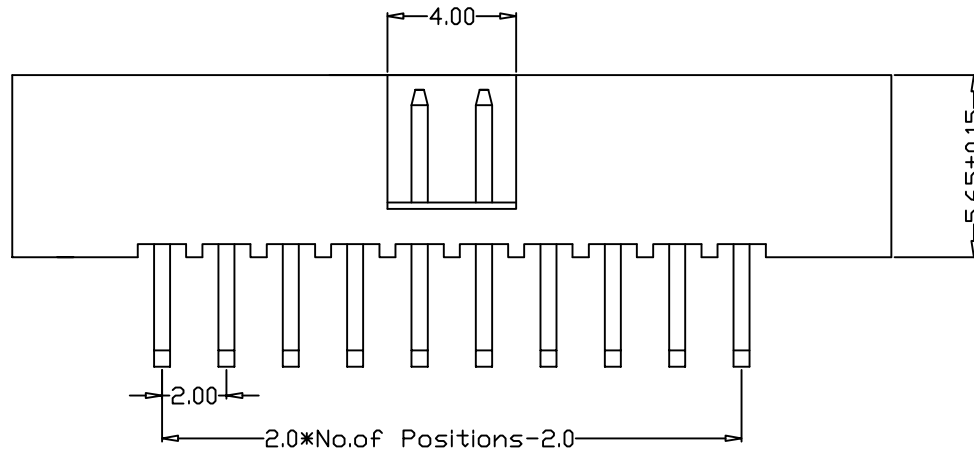


REV.	ECN.NO.	APPD.
A	/	/

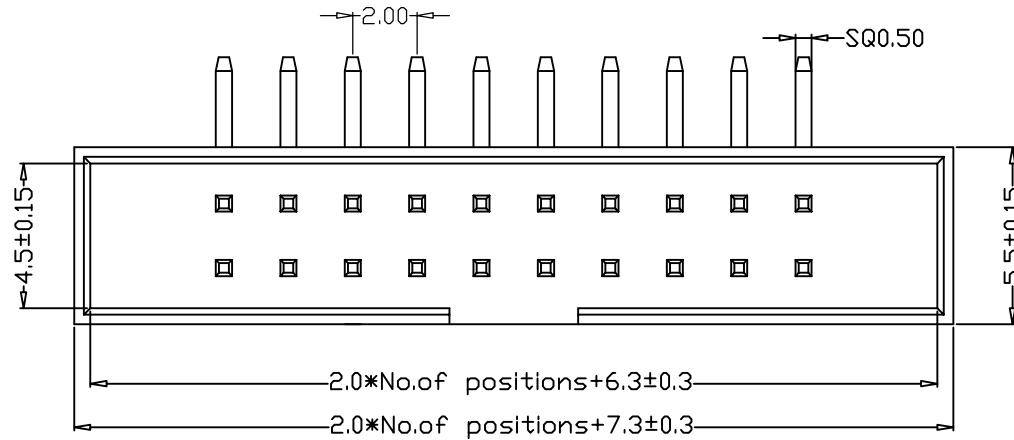


P. C. B LAYOUT

材质

塑胶 : PA6T/LCP-UL94 V-0
 端子 : 黄铜
 接触电镀: 镀金 Gold flash

产品参数

额定电流 : 2A
 耐电压值: $\leq 550V$ AC
 工作温度: $-40^{\circ}C$ to $+105^{\circ}C$
 接触电阻: $\leq 20m\Omega$
 绝缘电阻: $\geq 1000M\Omega$
 最大处理温度: $230^{\circ}C$ - $265^{\circ}C$

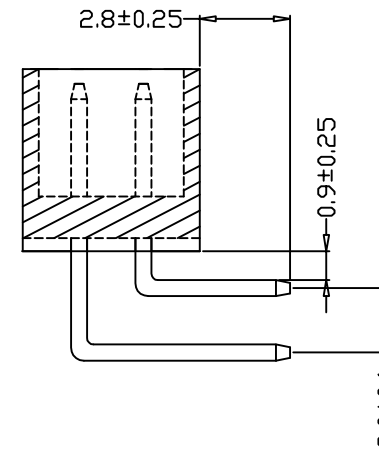

216104-1064-G31018

- 1: 吸塑盘
- 2: 吸塑管
- 5: 袋装
- 7: 管装

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ± 0.10	.X' $\pm 3'$
.XX ± 0.20	.XX' $\pm 2'$
.X ± 0.30	

FLW 深圳市华联威电子科技有限公司

HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.

APPROVED		PART NAME:	2.0间距筒牛 双排 90度 13PIN			
CHECKED		PART No:	216104-1064-G31018			C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.9.23		mm	1:1	10F1	A