
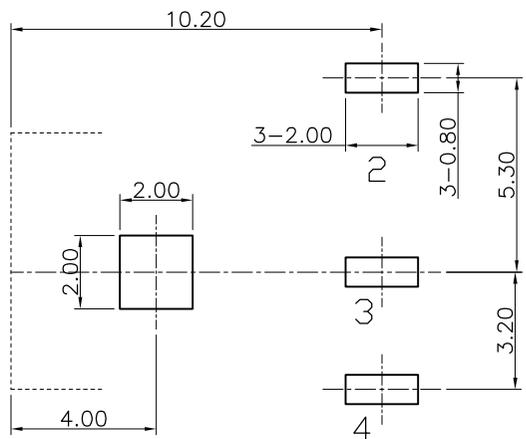
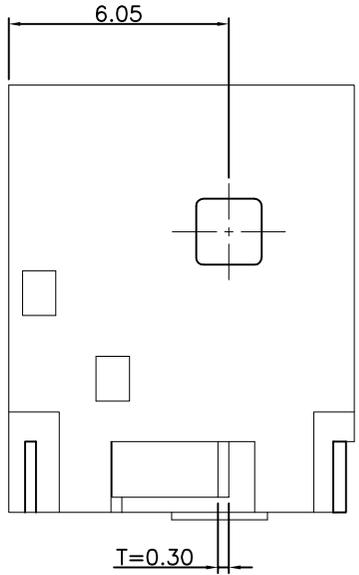
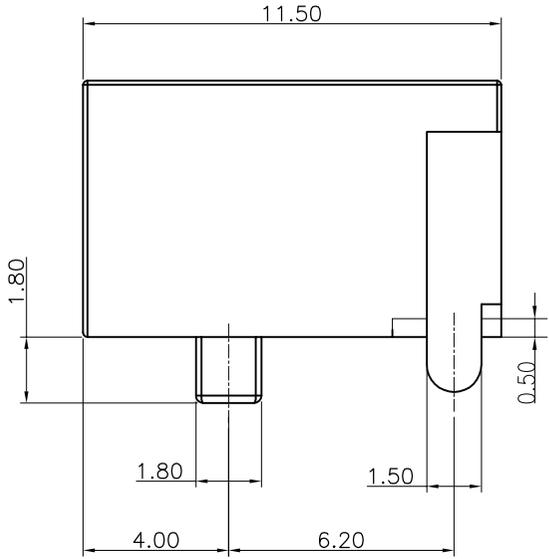




4	3	2	1
ECN.NO.	ECN DESCRIPTION	REV.	DATE
/	新版发行	A	2022.03.07
			weihong

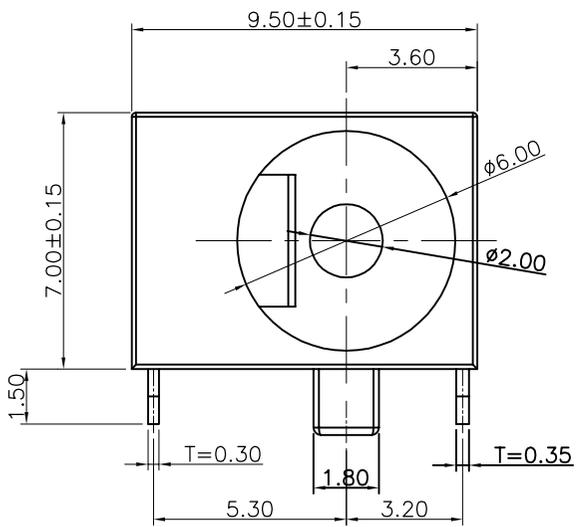

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS DIM±0.10mm;DEFAULT TOLERANCE:±0.05

技术要求

1. 插入力: 2.94~29.4N(0.3~3.0kgf)
2. 拔出力: 2.94~29.4N(0.3~3.0kgf)
3. 接触电阻: 50mΩ Max
4. 绝缘电阻: 100MΩ DC 1000V
5. 耐电压: AC 1000V 1min无飞弧及击穿
6. 耐久: 5000 10~20次/Min
7. 额定负载: DC 12V 2A
8. 适用温度范围: -25~85° C
9. 推荐使用插头:



								主要技术性能	
								额定电负荷	DC 30V\0.5A
5	DC-044-05	弹片脚	1	磷铜	0.3	镀镍锡	接触电阻	≤0.03Ω	
4	DC-044-04	插片脚	1	黄铜	0.3Y	镀镍锡	绝缘电阻	≥100MΩ	
3	DC-044-03	平片	1	黄铜	0.3Y	镀镍锡	耐压	AC500V(50Hz)/min	
2	DC-044-02	圆针	1	黄铜	2.0	镀镍锡	插拔力	3-20N	
1	DC-044-01	底座	1	PA9T		黑色	使用温度范围	-30~70°C	
序号	产品编号	产品名称	数量	材料	规格	处理	使用寿命	5000次	

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.						
.XXX ±0.10	.XX ±0.20					.X ±0.30	.X' ±2'	.XX' ±1'
APPROVED		PART NAME:	DC Jack (9.6x7.0x11.5) 中轴 2.0					
CHECKED		PART No:	JK1-123-C81R-1		C			
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET			
DATE	2022.03.07		mm	1:1	10F1			
					REV.			
					A			