
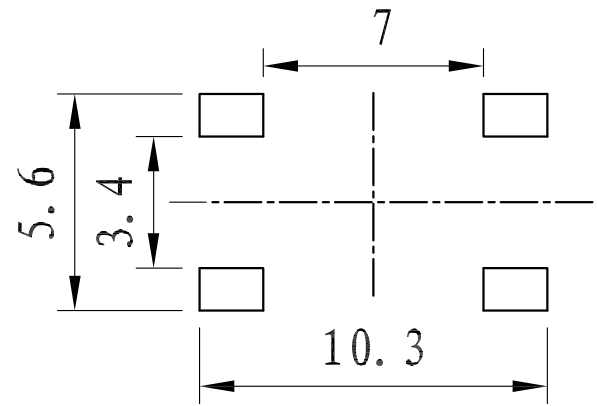





REV.	ECN.NO.	APPD.
A	EXXXXXXXXXXX	chenyiting

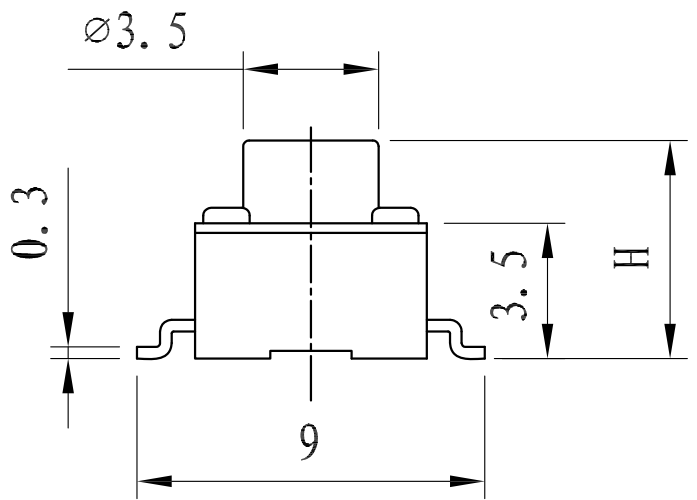

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $180 \pm 40gf$
4. 行程: $0.20 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles

TS4-0411-G618
 1: 铁壳镀镍
 G: 半金G/Fu
 6: LCP
 1: 黑色

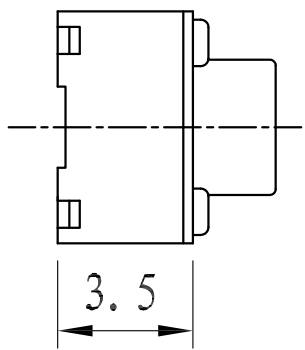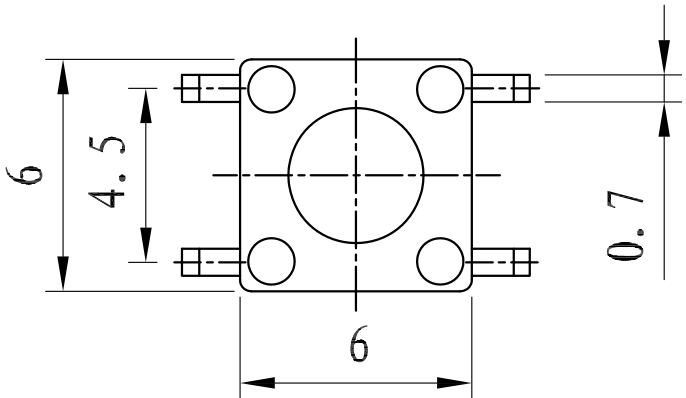

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ± 0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XX ± 0.20		.X' $\pm 3'$			
.X ± 0.30		.XX' $\pm 2'$			
APPROVED		PART NAME:	轻触开关6x6x5mm立贴		
CHECKED		PART No:	TS4-0411-G618	C	
DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2023.04.07		mm	1:1	1 OF 1
					REV. A