




REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	chenyiting



NOTES:

1.MATERIAL:

- 1.1 Housing: thermoplastic plastics,
- 1.2 terminals: Copper Alloy  
Gold plated overall
- 1.3 Shell: Steel&Copper Alloy  
Nickel/Tin Plated overall

2.ELECTRICAL CHARACTERISTICS:




- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :30 V Max
- 2.3 Contact Resistance:50 Milli ohms
- 2.4 Insulation Resistance:100 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:



- 3.1 Connector Mating force: 35N MAX
- 3.2 Connector Unmating force:7N min

4.ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature: -0°C to +50°C
- 4.2 Storage temperature: -20°C to +60°C

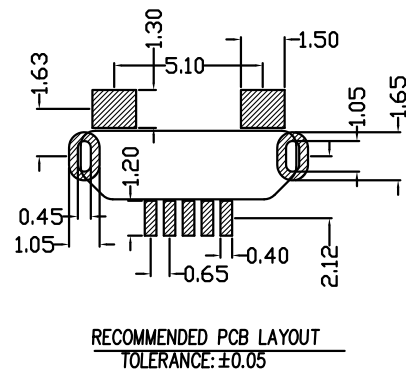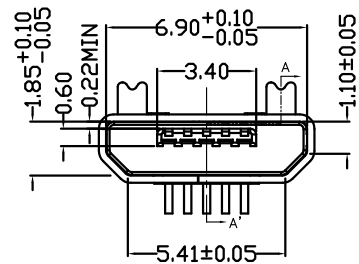

- U422-0115-G61018
- 1: 吸塑盒
- 5: 铜壳镀镍
- 1: 黑色
- G: 半金G/Fu
- 6: LCP



TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.10	.X' ±3'	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20	.XX' ±2'					
.X ±0.30						
APPROVED		PART NAME:	MICRO 5P 立贴SMT 脚长1.0 无卷边 加塞			
CHECKED		PART No:	U422-0115-G61018	C		A
DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2022.10.09		mm	1:1	10F1	A