

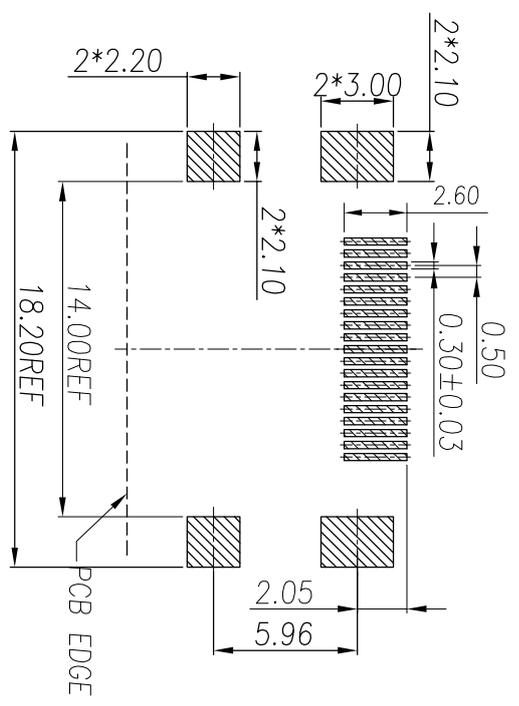
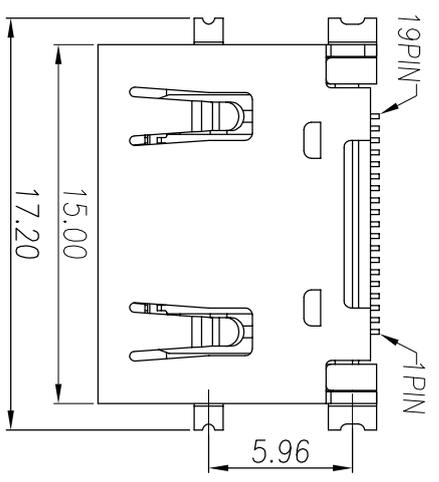
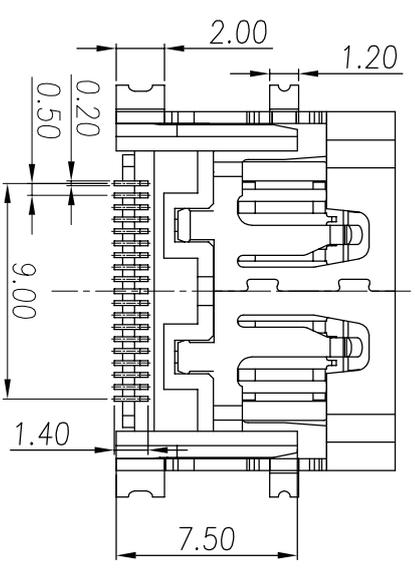


REV.	ECN.NO.	APPD.
A	XXXXXXXXXXXX	yongguifeng

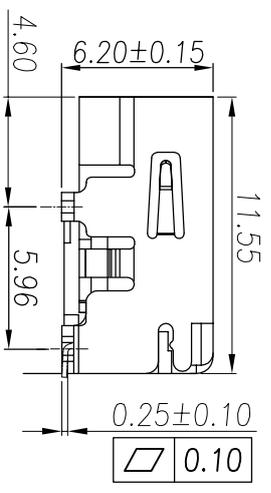

RECOMMENDED PCB LAYOUT (T:1.60mm)

- 备注:
- 1) 材质:  
 I-1 本体: LCP 94V-0 黑色  
 I-2 端子: C2680 T=0.20mm  
 I-3 铜壳: SPCC T=0.50mm
- 2) 镀层:  
 2-1 端子: 所有面镀镍, 接点镀金1U", 焊脚镀锡100U", 2-2 外壳: 镀80U"MIN
- 3) 技术规格  
 3-1. 额定电压: 40V  
 3-2. 额定电流: 0.5A  
 3-3. 绝缘电阻: 100兆欧最小  
 3-4. 接触电阻: 30毫欧最大  
 3-5. 操作温度: -20度到85度  
 3-6. 插入力: 44.1牛最大  
 3-7. 拔出力: 9.8牛最小, 44.1牛最大  
 3-8. 耐久: 10000次

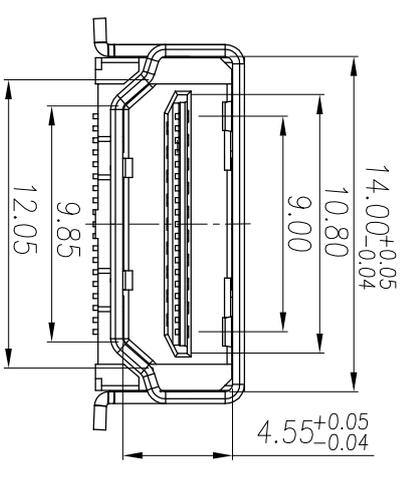

- HD24-013X-XXXXX8
- 1: 铁壳镀镍
  - 5: 铜壳镀镍
  - B: 不锈钢镀镍
  - 1: 半金1u"
  - 3: 半金3u"
  - 5: 半金5u"
  - G: 半金G/Fu"
  - 9: 镀全金1u"
  - 4: 镀全亮锡
  - 1: PA66
  - 2: PBT
  - 6: LCP
  - 1: 吸塑盒
  - 2: 吸塑管
  - 3: 载带
  - 6: 载带+贴麦拉
  - 1: 黑色
  - 2: 白色
  - 3: 米黄色

TOLERANCE UNLESS OTHERWISE SPECIFIED		XXX ±0.10		XX ±0.20		X ±0.30	
DRAWN		yongguifeng		DATE		2021.12.01	
PART NAME:		HDMI 19P 90度SMT四脚贴		PART No.:		HD24-0131-G61038	
CHECKED				PROJECTION:		mm	
APPROVED				UNIT:		SCALE	
				SHEET		1 OF 1	
				REV.		A	

**HLW** 深圳市华联威电子科技有限公司

HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.

A B C D E F 9 8 7 6 5 4 3 2 1