


REV.	ECN. NO.	APPD.
A	/	ZFY

NOTES:

1. MATERIAL:
 - 1.1 Housing:thermoplastic plastics
 - 1.2 terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
 - 1.3 Shell:Steel&Copper Alloy
Nickel/Au Plated overall
 2. characteristics:
 - 2.1 Rating Voltage : 30V AC.
 - 2.2 Rating Current:
5A for Vbus PIN;1.25A for Vconn PIN
 - 2.3 Contact Resistance:40 mΩ MAX.
 - 2.4 Insulation Resistance:100 MΩ MIN.
 - 2.5 Withstanding Voltage:AC 100V
 - 2.6 Mating force: 5~20N MAX
 - 2.7 Extraction force:8~20N Min
 - 2.8 Life test:10000Cycles MIN.
 - 2.9 Temperature Range: -30°C~+80°C.
- The product must be compliance ROHS

U572-382X-XXX0X8

- 3:载带
- 1:黑色
- B: 不锈钢镀镍
- G: 镀半金G/Fu
- 6:LCP

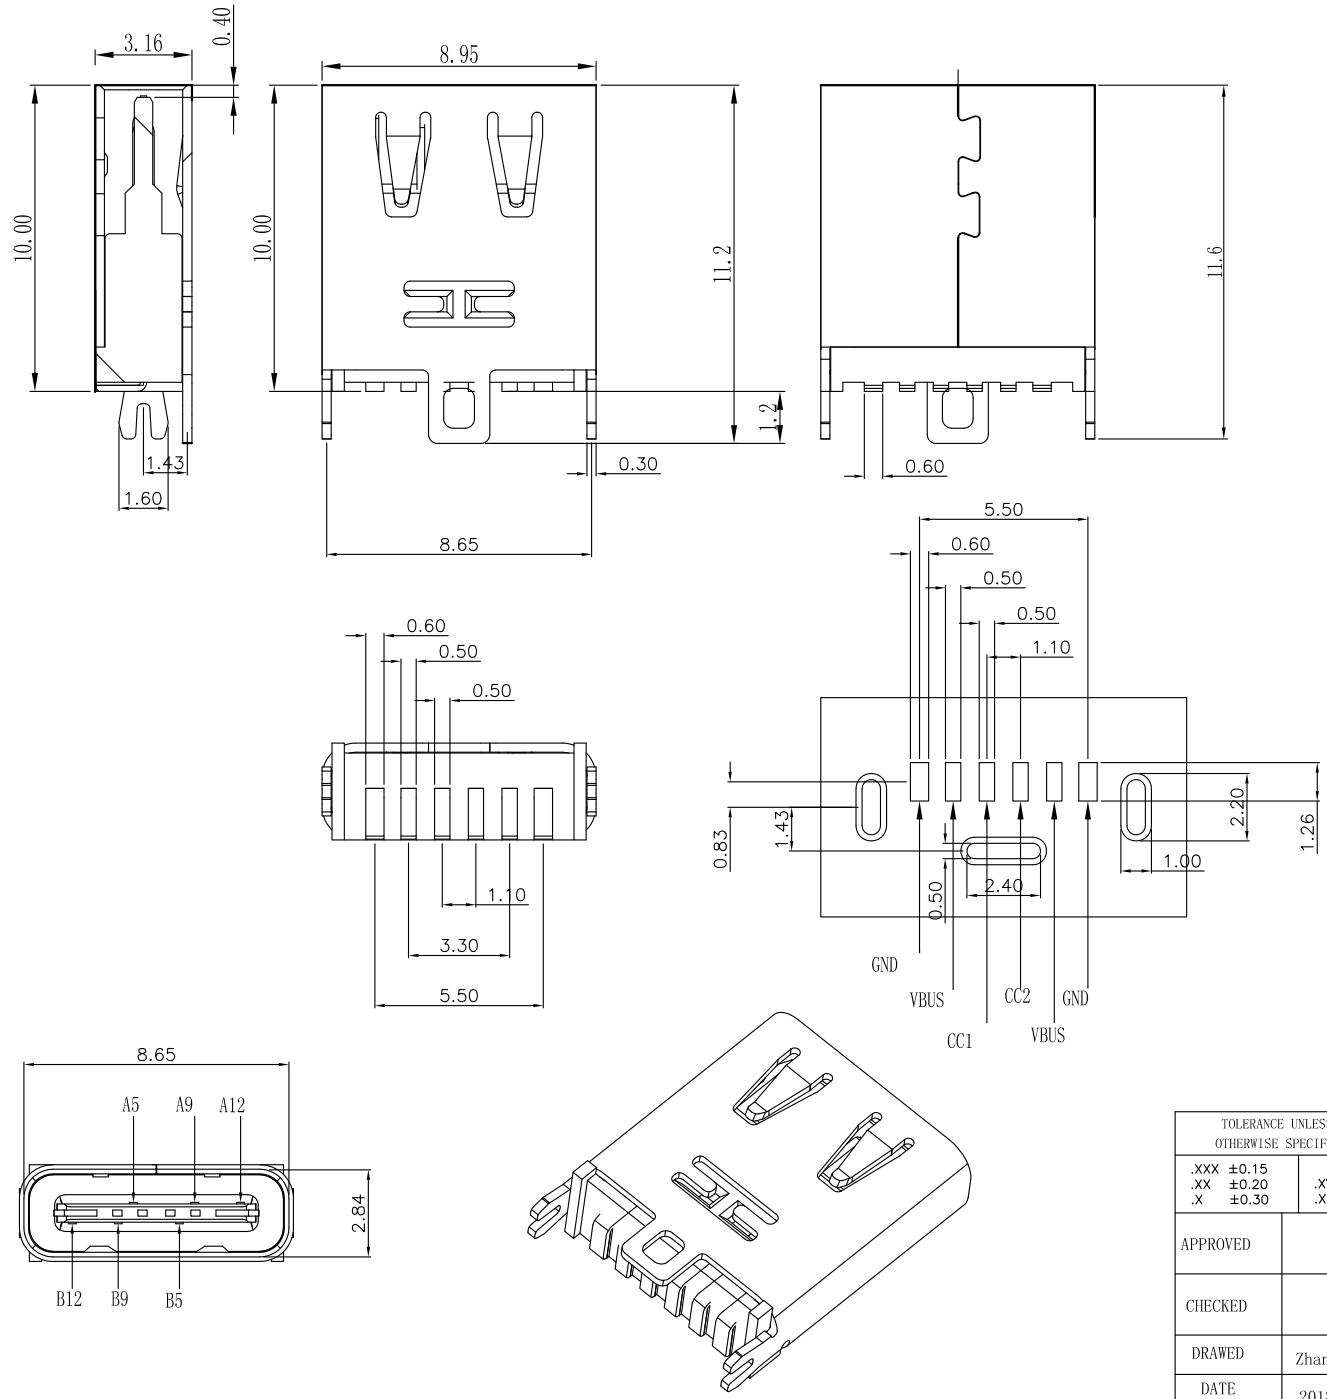

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司					
.XXX ±0.15		.XX ±0.20		.X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.	
.XX' ±5°		.X' ±2°		PART NAME:		USB TYPE C 6P立贴10.0	
APPROVED		PART No:		U572-382B-G61038		C	
CHECKED		PROJECTION:		UNIT:	SCALE:	SHEET:	REV.
DRAWN	ZhangFenYan	mm		1:1	10F1	A	
DATE	2018. 10. 10						