
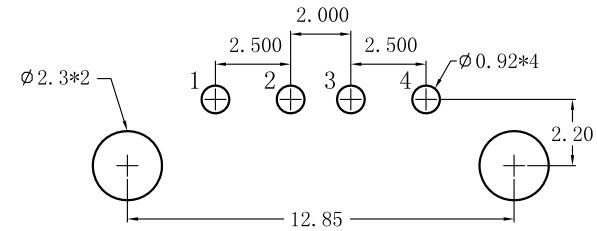
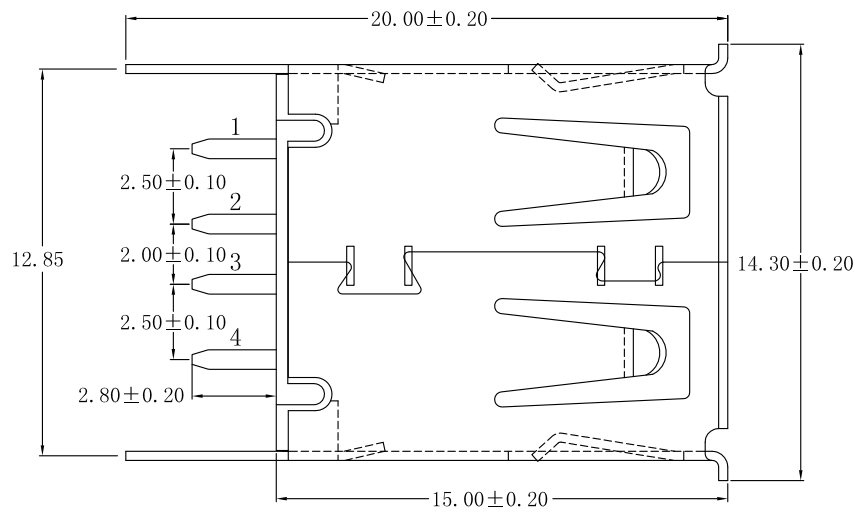
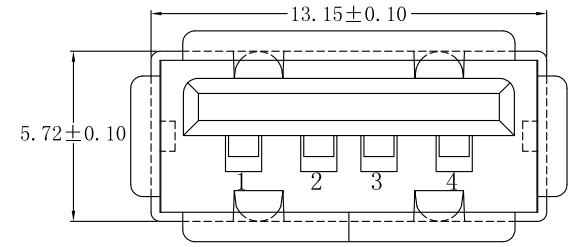


REV.	ECN.NO.	APPD.
AO	/	/

NOTES:

- MATERIAL:
 - Housing:thermoplastic plastics
 - terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
 - Shell:Steel&Copper Alloy
Nickel Plated overall
- ELECTRICAL CHARACTERISTICS:
 - Rating Current :1.5 Ampere
 - Rating Voltage :30 V Max
 - Contact Resistance:30 Milli ohms
 - Insulation Resistance:1000 Mega ohms Min.
- MECHANICAL CHARACTERISTICS:
 - Connector Mating force: 35N MAX(3.57Kgf)
 - Connector Unmating force:10N min(1.02Kgf)
 - Durability:1500Cycles.
- ENVIRONMENT CHARACTERISTICS:
 - Operating temperature:-0°C to +50°C
 - Storage temperature:-20°C to +60°C

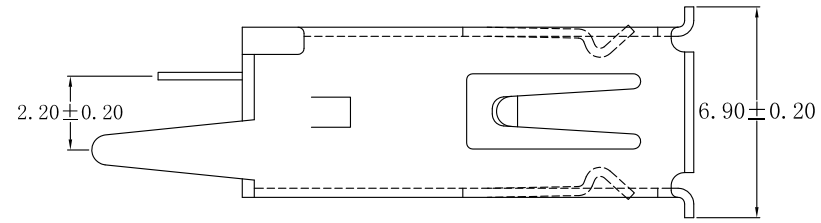

U223-4031-G22017
 1:铁壳镀镍
 G:半金G/Fu
 2:PBT
 1:吸塑盒
 2:白色

PIN NUMBER	SIGNAL NAME	TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.						
		.XXX ±0.10 .XX ±0.20 .X ±0.30	.X' ±3' .XX' ±2'					APPROVED	PART NAME:	PART No:
PIN 1	Vbus				USB AF 180度 直插直脚 15.0					
PIN 2	D-			CHECKED		PART No:	U223-4031-G22017			
PIN 3	D+			DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE:	SHEET:	REV.
PIN 4	GND			DATE	2023.03.16		mm	1:1	10F1	AO