

REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	yangguifeng

NOTES:

1. MATERIAL:

- 1.1 Housing:thermoplastic plastics
- 1.2 terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
- 1.3 Shell:Steel&Copper Alloy
Nickel/Au Plated overall

2. ELECTRICAL CHARACTERISTICS:

- 2.1 Rating Current :0.5 Ampere
- 2.2 Rating Voltage :40 V Max
- 2.3 Contact Resistance:30 Milli ohms
- 2.4 Insulation Resistance:100 Mega ohms Min.


3. MECHANICAL CHARACTERISTICS:

- 3.1 Connector Mating force: 4.5kg MAX
- 3.2 Connector Unmating force:1.0Kg min
- 3.3 Durability:10000Cycles.

4. ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature:-20 °C to +85 °C
- 4.2 Storage temperature:-20 °C to +65 °C

HD25-0144-G61018
 1:吸塑盒
 4:铁壳镀金
 G:半金G/Fu
 6:LCP
 1:黑色

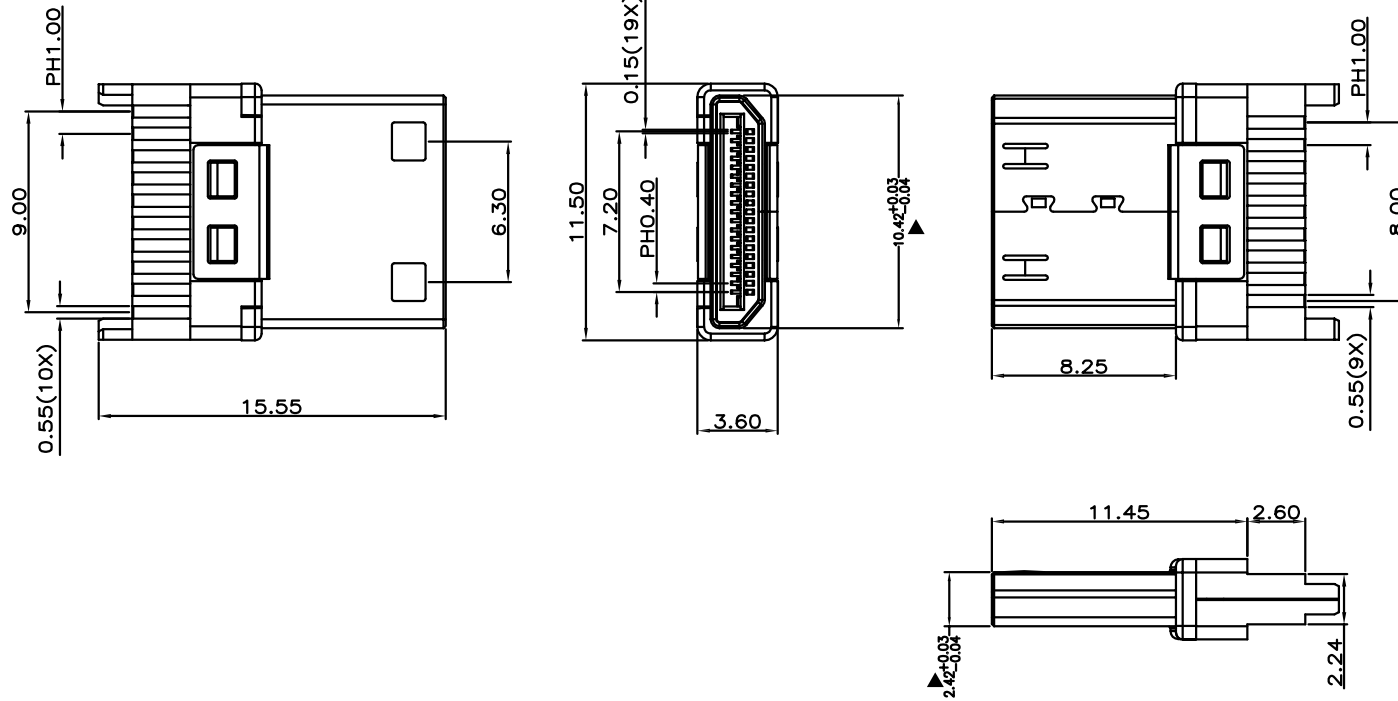

TOLERANCE UNLESS OTHERWISE SPECIFIED		HLW 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.	
APPROVED		PART NAME:	MINI HDMI 19PCM单头焊线		
CHECKED		PART No:	HD25-0144-G61018	C	
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2021.12.01		mm	1:1	1 OF 1
					REV. A